


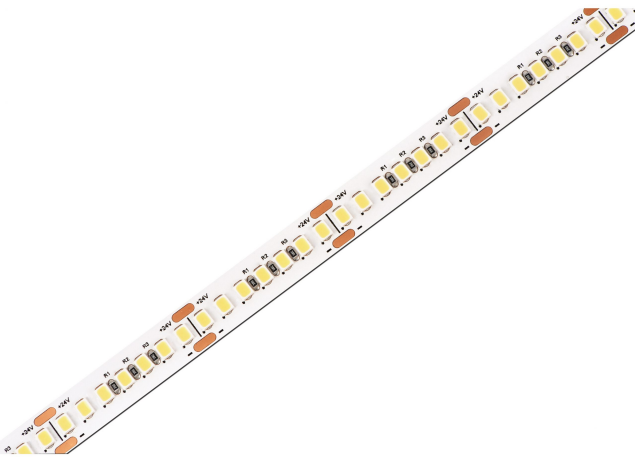

## FLOW K55010

### GENERAL DETAILS

|                      |         |
|----------------------|---------|
| INT-EXT ESTANQUEIDAD | IP20    |
| USO                  | Indoor  |
| GARANTÍA             | 5 years |

### ELECTRICAL DETAILS

|                                  |                                                                                                                                            |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| FUENTE DE LUZ                    | LED                                                                                                                                        |
| POTENCIA                         | 5 W, 10W, 15 W, 20 W, 30 W                                                                                                                 |
| TEMPERATURA DE COLOR             | 2200K, 2700K, 3000K, 4000K                                                                                                                 |
| FLUJO LUMÍNICO                   | 510 Lm, 550 Lm, 590 Lm, 631 Lm, 1090 Lm, 1140 Lm, 1193 Lm, 1530 Lm, 1630 Lm, 1735 Lm, 2080 Lm, 2130 Lm, 2200 Lm, 3602 Lm, 3700 Lm, 3800 Lm |
| EFICIENCIA LUMÍNICA              | 79 Lm/W, 85 Lm/W, 87 Lm/W, 88 Lm/W, 90 Lm/W, 91 Lm/W, 95 Lm/W, 97 Lm/W, 102 Lm/W, 104 Lm/W, 107 Lm/W, 110 Lm/W                             |
| DIMABLE                          | No Dim                                                                                                                                     |
| DRIVER                           | Remote                                                                                                                                     |
| CLASE DE SEGURIDAD               | III                                                                                                                                        |
| ÍNDICE DE REPRODUCCIÓN CROMÁTICA | CRI>90                                                                                                                                     |
| TENSIÓN                          | 220-240 V                                                                                                                                  |
| VIDA UTIL                        | 50.000 h                                                                                                                                   |

### GENERAL DIMENSIONS

|                         |                                 |
|-------------------------|---------------------------------|
| DIMENSIÓN               | 8 mm, 10 mm                     |
| CORTE                   | 100 mm, 26,3 mm, 33,3 mm, 50 mm |
| DIMENSIONES DE EMBALAJE | N/A                             |

\*Please might expect a max.15% figure reduction in finishes other than white