




storm pro k-select
K60011.01.SR.BK-BK.90.ST.8.01

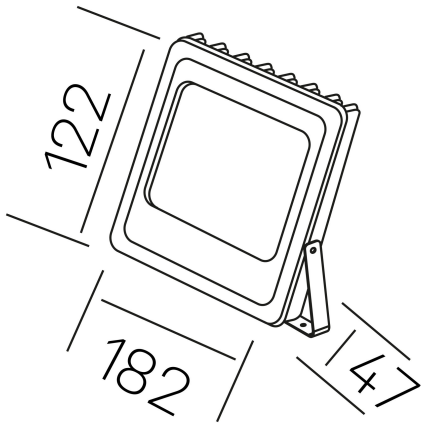

GENERAL DETAILS

| | |
|--------------------|-------------|
| INSTALLATION | Surface |
| FINISHES ALUMINIUM | Black-Black |
| LIGHT DIRECTION | Fixed |
| BEAM ANGLE | 120° |
| INT/EXT IP DEGREE | IP 66 |
| MATERIAL | Aluminum |
| IK DEGREE | IK08 |
| UTILIZATION | Outdoor |
| WARRANTY | 3 years |

ELECTRICAL DETAILS

| | |
|------------------------|------------------------|
| LAMP | LED |
| POWER | 20 W |
| COLOUR TEMPERATURE | 3CCT 3000K-4000K-6000K |
| LUMINOUS FLUX | 1850-1900-1950 Lm |
| EFFICACY DIMMING | 93-95-98 Lm/W |
| DRIVER | Integrated |
| CLASS PROTECTION | II |
| COLOUR RENDERING INDEX | CRI >80 |
| VOLTAGE | 200-277 V |
| FRECUENCIA | 50-60 Hz |
| CURRENT INTENSITY | 75 mA |
| LIFE TIME | 35.000 h |

GENERAL DIMENSIONS

| | |
|-------------------------|-----------|
| DIMENSIONS | 182x47 mm |
| HEIGHT | h 122 mm |
| DIMENSIONES DE EMBALAJE | N/A |
| PESO NETO | 0.65 |

*Please might expect a max. 15% figure reduction in finishes other than white