




**versus**  
K51100.03.RF.BK-BK.38.ST.8.30.PU

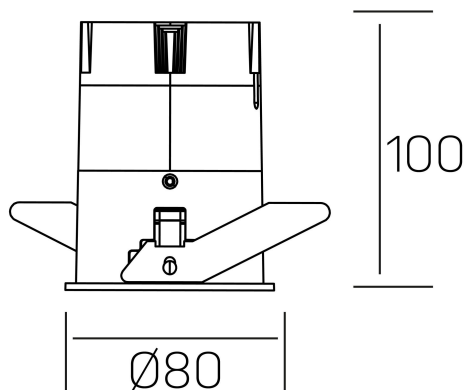

## GENERAL DETAILS

|                    |                     |
|--------------------|---------------------|
| INSTALLATION       | recessed with frame |
| FINISHES ALUMINIUM | Black-Black         |
| LIGHT DIRECTION    | Fixed               |
| BEAM ANGLE         | 38°                 |
| INT/EXT IP DEGREE  | IP 23               |
| MATERIAL           | Aluminum            |
| IK DEGREE          | IK03                |
| UTILIZATION        | Indoor              |
| WARRANTY           | 3 years             |

## ELECTRICAL DETAILS

|                        |           |
|------------------------|-----------|
| LAMP                   | LED       |
| POWER                  | 15 W      |
| COLOUR TEMPERATURE     | 3000K     |
| LUMINOUS FLUX          | 1275 Lm   |
| EFFICACY DIMMING       | 91 Lm/W   |
| DIMABLE                | Push      |
| DRIVER                 | Remote    |
| CLASS PROTECTION       | II        |
| COLOUR RENDERING INDEX | CRI >80   |
| VOLTAGE                | 220-240 V |
| FRECUENCIA             | 50-60 Hz  |
| CURRENT INTENSITY      | 350 mA    |
| LIFE TIME              | 35.000 h  |

## GENERAL DIMENSIONS

|                         |                    |
|-------------------------|--------------------|
| DIMENSIONS              | Ø 80 mm            |
| CUT OUT                 | Ø 75 mm            |
| HEIGHT                  | h 100 mm           |
| DIMENSIONES DE EMBALAJE | 115 × 165 × 115 mm |
| PESO NETO               | 0.38               |

\*Please might expect a max.15% figure reduction in finishes other than white