

GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	White-White
OPTIC COVER	Cielo, Microprismatico, Opal
LIGHT DIRECTION	Fixed
INT/EXT IP DEGREE	IP20/40
MATERIAL	Aluminum
IK DEGREE	IK03
UTILIZATION	Indoor
WARRANTY	3 years

ELECTRICAL DETAILS


LAMP	LED
POWER	40 W
COLOUR TEMPERATURE	3CCT 3000K-4000K-6000K
LUMINOUS FLUX	3450-3850-3650 Lm, 3600-4000-3800 Lm, 3600-4000-3800 Lm*
DIMABLE	1.10v, DALI, No Dim, Push
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	1000 mA
LIFE TIME	50.000 h

GENERAL DIMENSIONS

DIMENSIONS	620x620 mm
CUT OUT	620x620 mm
HEIGHT	h 9 mm
DIMENSIONES DE EMBALAJE	685 x 685 x 35 mm
PESO NETO	3.25

*El difusor SK (SKY) es para fines decorativos (lúmenes no medibles)

*Please might expect a max.15% figure reduction in finishes other than white

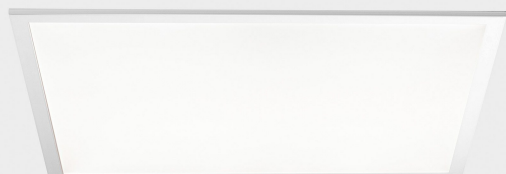

chess de k-select
K50515.RF