


**chess elite k-select**  
K50523.02.RF.WH-WH.MP.ST.8.01.PU

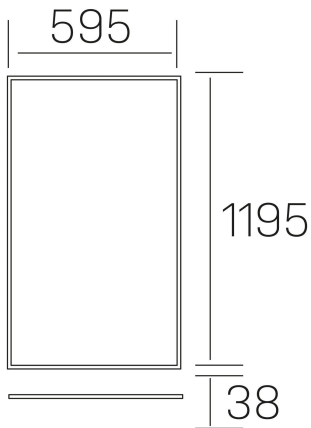

#### GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	White-White
OPTIC COVER	Microprismatico
LIGHT DIRECTION	Fixed
INT/EXT IP DEGREE	IP20/40
MATERIAL	Aluminum
IK DEGREE	IK03
UTILIZATION	Indoor
WARRANTY	5 years

#### ELECTRICAL DETAILS

LAMP	LED
POWER	60 W
COLOUR TEMPERATURE	3CCT 3000K-4000K-6000K
LUMINOUS FLUX	4250-4950-4450 Lm
EFFICACY DIMMING	73-85-76 Lm/W
DIMABLE	Push
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	1500 mA
LIFE TIME	50.000 h

#### GENERAL DIMENSIONS

DIMENSIONS	1195×595 mm
CUT OUT	1195×595 mm (techo modular)
HEIGHT	h 38 mm
DIMENSIONES DE EMBALAJE	1240 × 670 × 35 mm
PESO NETO	4.70

\*Please might expect a max.15% figure reduction in finishes other than white