


**chess k-select**  
K50510.02.RF.WH-WH.MP.ST.8.01

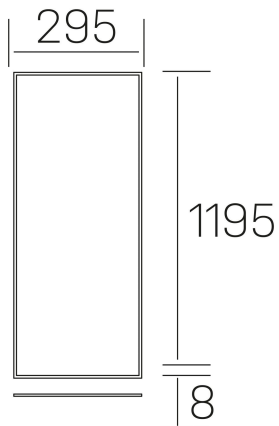

#### GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	White-White
OPTIC COVER	Microprismatico
LIGHT DIRECTION	Fixed
INT/EXT IP DEGREE	IP20/40
MATERIAL	Aluminum
IK DEGREE	IK03
UTILIZATION	Indoor
WARRANTY	3 years

#### ELECTRICAL DETAILS

LAMP	LED
POWER	36 W
COLOUR TEMPERATURE	3CCT 3000K-4000K-6000K
LUMINOUS FLUX	2300-2700-2500 Lm
EFFICACY DIMMING	67-79-73 Lm/W
DIMABLE	No Dim
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	900 mA
LIFE TIME	50.000 h

#### GENERAL DIMENSIONS

DIMENSIONS	1195×295 mm
CUT OUT	1195×295 mm (techo modular)
HEIGHT	h 8 mm
DIMENSIONES DE EMBALAJE	N/A
PESO NETO	2.32

\*Please might expect a max.15% figure reduction in finishes other than white