


**disc sq**  
K51703.03.RF.WH-WH.OP.ST.8.40.PC

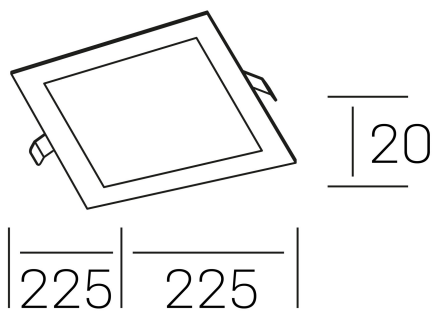

#### GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	White-White
LIGHT DIRECTION	Fixed
INT/EXT IP DEGREE	IP 43
MATERIAL	Aluminum
IK DEGREE	IK03
UTILIZATION	Indoor
WARRANTY	3 years

#### ELECTRICAL DETAILS

LAMP	LED
POWER	20 W
COLOUR TEMPERATURE	4000K
LUMINOUS FLUX	1800 lm
EFFICACY DIMMING	92 Lm/W
DIMABLE	PHASE CUT
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	500 mA
LIFE TIME	35.000 h

#### GENERAL DIMENSIONS

DIMENSIONS	225×225 mm
CUT OUT	210×210 mm
HEIGHT	h 20mm
DIMENSIONES DE EMBALAJE	202 × 210 × 45 mm
PESO NETO	0.40

\*Please might expect a max.15% figure reduction in finishes other than white