


**disc sq**  
K51703.04.RF.WH-WH.OP.ST.8.40.DA

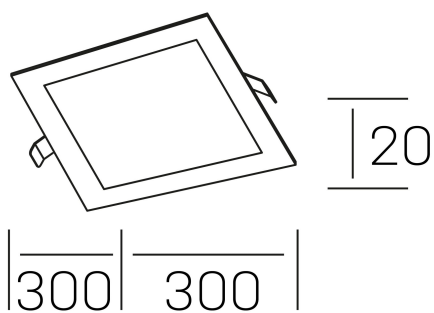

## GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	White-White
LIGHT DIRECTION	Fixed
INT/EXT IP DEGREE	IP 43
MATERIAL	Aluminum
IK DEGREE	IK03
UTILIZATION	Indoor
WARRANTY	3 years

## ELECTRICAL DETAILS

LAMP	LED
POWER	8 W, 12 W, 20 W, 24 W
COLOUR TEMPERATURE	4000K
LUMINOUS FLUX	2350 Lm
EFFICACY DIMMING	100 Lm/W
DIMABLE	DALI
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	300 mA, 350 mA, 500 mA, 600 mA
LIFE TIME	35.000 h

## GENERAL DIMENSIONS

DIMENSIONS	300×300 mm
CUT OUT	285×285 mm
HEIGHT	h 20mm
DIMENSIONES DE EMBALAJE	202 × 210 × 45 mm
PESO NETO	0.66

\*Please might expect a max.15% figure reduction in finishes other than white