




**disc**  
K51702.06.RF.GY-GY.OP.ST.8.40.PU

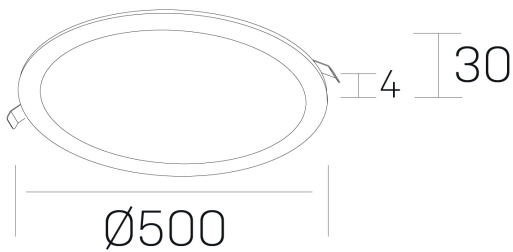

#### GENERAL DETAILS

|                    |                     |
|--------------------|---------------------|
| INSTALLATION       | recessed with frame |
| FINISHES ALUMINIUM | Black-Black         |
| LIGHT DIRECTION    | Fixed               |
| INT/EXT IP DEGREE  | IP 43               |
| MATERIAL           | Aluminum            |
| IK DEGREE          | IK03                |
| UTILIZATION        | Indoor              |
| WARRANTY           | 5 years             |

#### ELECTRICAL DETAILS

|                        |           |
|------------------------|-----------|
| LAMP                   | LED       |
| POWER                  | 48 W      |
| COLOUR TEMPERATURE     | 4000K     |
| LUMINOUS FLUX          | 4150 Lm   |
| EFFICACY DIMMING       | 89 Lm/W   |
| DIMABLE                | Push      |
| DRIVER                 | Remote    |
| CLASS PROTECTION       | II        |
| COLOUR RENDERING INDEX | CRI >80   |
| VOLTAGE                | 220-240 V |
| FRECUENCIA             | 50-60 Hz  |
| CURRENT INTENSITY      | 1200 mA   |
| LIFE TIME              | 50.000 h  |

#### GENERAL DIMENSIONS

|                         |          |
|-------------------------|----------|
| DIMENSIONS              | Ø 500 mm |
| CUT OUT                 | Ø 485 mm |
| HEIGHT                  | h 30 mm  |
| DIMENSIONES DE EMBALAJE | N/A      |

\*Please might expect a max.15% figure reduction in finishes other than white