




**fame**  
K51500.03.TK.BK-BK.38.ST.8.40.DA

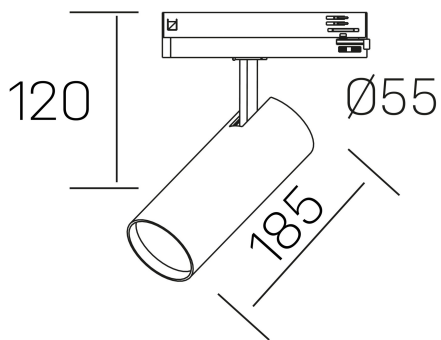

## GENERAL DETAILS

INSTALLATION	Tracklight
FINISHES ALUMINIUM	Black-Black
LIGHT DIRECTION	Orientable
TILTING DEGREES	90°
ROTATION DEGREES	360°
BEAM ANGLE	38°
INT/EXT IP DEGREE	IP20
MATERIAL	Aluminum
IK DEGREE	IK02
UTILIZATION	Indoor
WARRANTY	5 years

## ELECTRICAL DETAILS

LAMP	LED
POWER	30 W
COLOUR TEMPERATURE	4000K
LUMINOUS FLUX	2670 Lm
EFFICACY DIMMING	92 Lm/W
DIMABLE	DALI
DRIVER	Integrated
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	700 mA
LIFE TIME	50.000 h

## GENERAL DIMENSIONS

DIMENSIONS	185 x Ø 75 mm
HEIGHT	h 120 mm, h 95 mm
DIMENSIONES DE EMBALAJE	205 x 225 x 95 mm
PESO NETO	0.38

\*Please might expect a max.15% figure reduction in finishes other than white