




hammer

K60000.01.WS.GY-GY.15.ST.8.30

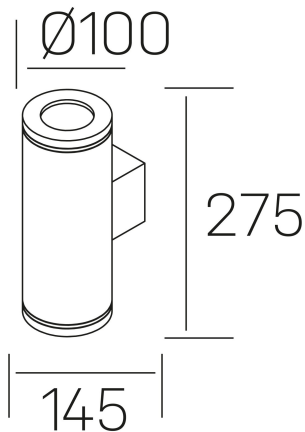

GENERAL DETAILS

INSTALLATION	Wall Surface
FINISHES ALUMINIUM	Grey-Grey
LIGHT DIRECTION	Fixed
BEAM ANGLE	15°
INT/EXT IP DEGREE	IP 65
MATERIAL	Aluminum
IK DEGREE	IK 6
UTILIZATION	Outdoor
WARRANTY	3 years

ELECTRICAL DETAILS

LAMP	LED
POWER	30 W
COLOUR TEMPERATURE	3000K
LUMINOUS FLUX	3000 Lm
EFFICACY DIMMING	98 Lm/W
DIMABLE	No Dim
DRIVER	Integrated
CLASS PROTECTION	I
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	700 mA
LIFE TIME	35.000 h

GENERAL DIMENSIONS

DIMENSIONS	Ø 100×145 mm
HEIGHT	h 275 mm
DIMENSIONES DE EMBALAJE	280 × 150 × 105 mm
PESO NETO	2.22

*Please might expect a max.15% figure reduction in finishes other than white