


**lim sq**  
K50321.02.RF.BK-BK.MP.ST.8.30.PC

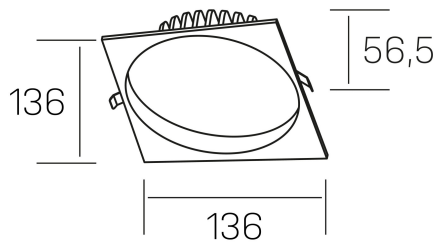

## GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	Black-Black
OPTIC COVER	Microprismatico
LIGHT DIRECTION	Fixed
INT/EXT IP DEGREE	IP 44
MATERIAL	Aluminum
IK DEGREE	IK 6
UTILIZATION	Indoor
WARRANTY	3 years

## ELECTRICAL DETAILS

LAMP	LED
POWER	12 W
COLOUR TEMPERATURE	3000K
LUMINOUS FLUX	1030 Lm
EFFICACY DIMMING	85 Lm/W
DIMABLE	PHASE CUT
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	300 mA
LIFE TIME	35.000 h

## GENERAL DIMENSIONS

DIMENSIONS	136×136 mm
CUT OUT	Ø 120 mm
HEIGHT	h 56,5 mm
DIMENSIONES DE EMBALAJE	145 × 145 × 70 mm
PESO NETO	0.36

\*Please might expect a max.15% figure reduction in finishes other than white