


lim sq
K50321.02.RF.BK-BK.MP.ST.8.40.D1

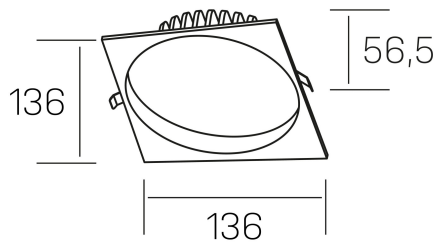

GENERAL DETAILS

| | |
|--------------------|---------------------|
| INSTALLATION | recessed with frame |
| FINISHES ALUMINIUM | Black-Black |
| OPTIC COVER | Microprismatico |
| LIGHT DIRECTION | Fixed |
| INT/EXT IP DEGREE | IP 44 |
| MATERIAL | Aluminum |
| IK DEGREE | IK 6 |
| UTILIZATION | Indoor |
| WARRANTY | 3 years |

ELECTRICAL DETAILS

| | |
|------------------------|-----------|
| LAMP | LED |
| POWER | 12 W |
| COLOUR TEMPERATURE | 4000K |
| LUMINOUS FLUX | 1100 lm |
| EFFICACY DIMMING | 91 Lm/W |
| DIMABLE | 1.10v |
| DRIVER | Remote |
| CLASS PROTECTION | II |
| COLOUR RENDERING INDEX | CRI >80 |
| VOLTAGE | 220-240 V |
| FRECUENCIA | 50-60 Hz |
| CURRENT INTENSITY | 300 mA |
| LIFE TIME | 35.000 h |

GENERAL DIMENSIONS

| | |
|-------------------------|-------------------|
| DIMENSIONS | 136×136 mm |
| CUT OUT | Ø 120 mm |
| HEIGHT | h 56,5 mm |
| DIMENSIONES DE EMBALAJE | 145 × 145 × 70 mm |
| PESO NETO | 0.36 |

*Please might expect a max.15% figure reduction in finishes other than white