


# lim sq

K50321.02.RF.WH-WH.MP.ST.8.40.PC

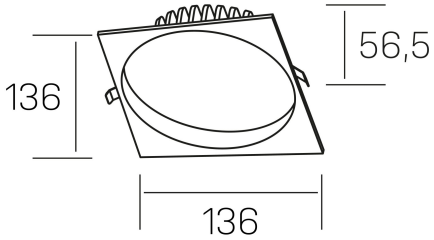


## GENERAL DETAILS

| | |
|---|---|
| INSTALLATION | recessed with frame |
| FINISHES ALUMINIUM | White-White |
| OPTIC COVER | Microprismatico |
| LIGHT DIRECTION | Fixed |
| INT/EXT IP DEGREE | IP 44 |
| MATERIAL | Aluminum |
| IK DEGREE | IK 6 |
| UTILIZATION | Indoor |
| WARRANTY | 5 years |

## ELECTRICAL DETAILS

| | |
|---|---|
| LAMP | LED |
| POWER | 12 W |
| COLOUR TEMPERATURE | 4000K |
| LUMINOUS FLUX | 1100 lm |
| EFFICACY DIMMING | 91 Lm/W |
| DIMABLE | PHASE CUT |
| DRIVER | Remote |
| CLASS PROTECTION | II |
| COLOUR RENDERING INDEX | CRI >80 |
| VOLTAGE | 220-240 V |
| CURRENT INTENSITY | 300 mA |
| LIFE TIME | 50.000 h |

## GENERAL DIMENSIONS

| | |
|---|---|
| DIMENSIONS | 136×136 mm |
| CUT OUT | Ø 120 mm |
| HEIGHT | h 56,5 mm |
| DIMENSIONES DE EMBALAJE | 145 × 145 × 70 mm |
| PESO NETO | 0.36 |

*Please might expect a max.15% figure reduction in finishes other than white