




**lim**  
K50320.02.RF.BK-BK.MP.ST.8.40.PC

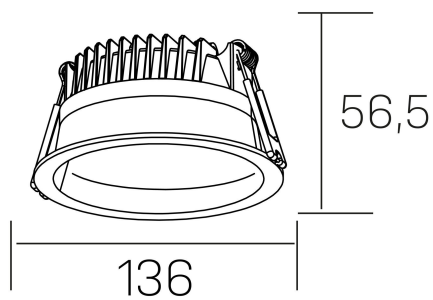

#### GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	Black-Black
OPTIC COVER	Microprismatico
LIGHT DIRECTION	Fixed
INT/EXT IP DEGREE	IP 44
MATERIAL	Aluminum
IK DEGREE	IK 6
UTILIZATION	Indoor
WARRANTY	3 years

#### ELECTRICAL DETAILS

LAMP	LED
POWER	12 W
COLOUR TEMPERATURE	4000K
LUMINOUS FLUX	1100 lm
EFFICACY DIMMING	91 Lm/W
DIMABLE	PHASE CUT
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	300 mA
LIFE TIME	35.000 h

#### GENERAL DIMENSIONS

DIMENSIONS	Ø 136 mm
CUT OUT	Ø 120 mm
HEIGHT	h 56,5 mm
DIMENSIONES DE EMBALAJE	145 × 145 × 70 mm
PESO NETO	0.36

\*Please might expect a max.15% figure reduction in finishes other than white