


LUMO MINI

Referencia K51302.22.RF.BK-BK.28.ST.9.40.PU

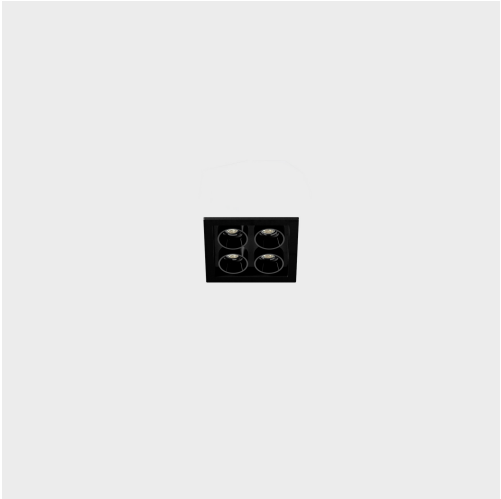

Categories: [lumo mini collection](#), [recessed with Frame](#)

GENERAL DETAILS	ELECTRICAL DETAILS	
	Technical Specifications	General Dimensions
Installation:	Lamp: LED	Dimensions:
	Power: 5 W	.03 (64x28mm)
with frame	6,5W 8 W	.05
	14,5W 16 W	(100x28mm)
Finishes	Colour	.10
	temperature:	(190x28mm)
aluminium:	2700K 3000K	.22 (46x46mm)
	4000K	.33
Black-Black	Luminous flux:	(64x64mm)
	361 Lm 385	Cut out: 42×42
Light	Lm 439 Lm	mm 60×24
	482 Lm 510	mm 60×60
direction:	Lm 585 Lm	mm 96×24
	602 Lm 638	mm 186×24
Fixed	Lm 731 Lm	mm
	1084 Lm	Height: h 38
Beam	1204 Lm	mm
	1261 Lm	
angle: 38°	1316 Lm	
	1463 Lm	
28° 50°	Efficacy	
	dimming: 72	
Int/ext ip	Lm/W 74	
	Lm/W 75	
degree:	Lm/W 77	
	Lm/W 78	
IP20/23	Lm/W 79	
	Lm/W 80	
Material:	Lm/W 87	
	Lm/W 88	
Aluminum	Lm/W 90	
	Lm/W 91	
IK degree:	Lm/W	
	IK 6	
Utilization:	Dimable: DALI	
	No Dim	
Warranty: 5	Push	
	Driver:	
years	Remote	
	Class	
	protection: II	
	Colour	
	rendering	
	index: CRI>90	
	Voltage:	
	220-240 V	
	Current	
	intensity: 500	
	mA	
	Life time:	
	50.000 h	

Frecuency:
50-60 Hz

ELECTRICAL DETAILS

Lamp: LED
Power: 5 W | 6,5W | 8 W | 14,5W |
16 W
Colour temperature: 2700K | 3000K
| 4000K
Luminous flux: 361 Lm | 385 Lm |
439 Lm | 482 Lm | 510 Lm | 585 Lm
| 602 Lm | 638 Lm | 731 Lm | 1084
Lm | 1204 Lm | 1261 Lm | 1316 Lm |
1463 Lm
Efficacy dimming: 72 Lm/W | 74
Lm/W | 75 Lm/W | 77 Lm/W | 78
Lm/W | 79 Lm/W | 80 Lm/W | 87
Lm/W | 88 Lm/W | 90 Lm/W | 91
Lm/W
Dimable: DALI | No Dim | Push
Driver: Remote
Class protection: II
Colour rendering index: CRI>90
Voltage: 220-240 V
Current intensity: 500 mA
Life time: 50.000 h

GENERAL DETAILS

Installation: recessed
with frame
Finishes aluminium:
Black-Black
Light direction: Fixed
Beam angle: 38º |
28º | 50º
Int/ext ip degree:
IP20/23
Material: Aluminum
IK degree: IK 6
Utilization: Indoor
Warranty: 5 years

GENERAL DIMENSIONS

Dimensions: .03 (64x28mm) |
.05 (100x28mm) | .10
(190x28mm) | .22 (46x46mm)
| .33 (64x64mm)
Cut out: 42×42 mm | 60×24
mm | 60×60 mm | 96×24 mm
| 186×24 mm
Height: h 38 mm

Frecuency: 50-60 Hz

