




## lumo mini

K51302.33.TR.BK-BK.28.ST.9.40.PU

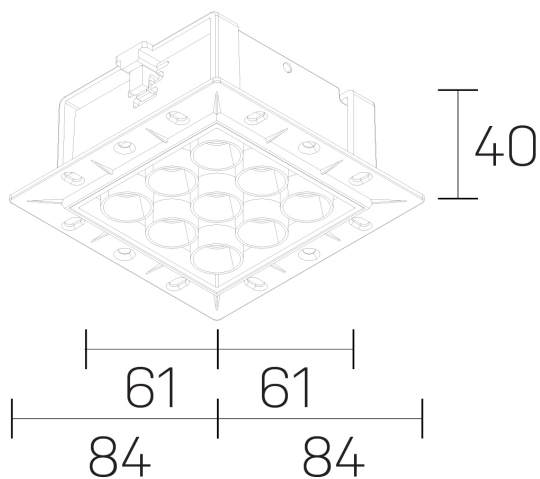

### GENERAL DETAILS

|                    |             |
|--------------------|-------------|
| INSTALLATION       | Trimless    |
| FINISHES ALUMINIUM | Black-Black |
| LIGHT DIRECTION    | Fixed       |
| BEAM ANGLE         | 28°         |
| INT/EXT IP DEGREE  | IP20/23     |
| MATERIAL           | Aluminum    |
| IK DEGREE          | IK 6        |
| UTILIZATION        | Indoor      |
| WARRANTY           | 5 years     |

### ELECTRICAL DETAILS

|                        |           |
|------------------------|-----------|
| LAMP                   | LED       |
| POWER                  | 14,5W     |
| COLOUR TEMPERATURE     | 4000K     |
| LUMINOUS FLUX          | 1316 Lm   |
| EFFICACY DIMMING       | 91 Lm/W   |
| DIMABLE                | Push      |
| DRIVER                 | Remote    |
| CLASS PROTECTION       | II        |
| COLOUR RENDERING INDEX | CRI>90    |
| VOLTAGE                | 220-240 V |
| CURRENT INTENSITY      | 500 mA    |
| LIFE TIME              | 50.000 h  |

### GENERAL DIMENSIONS

|                         |               |
|-------------------------|---------------|
| DIMENSIONS              | .03 (84x84mm) |
| CUT OUT                 | 72x66 mm      |
| HEIGHT                  | h 40 mm       |
| DIMENSIONES DE EMBALAJE | N/A           |

\*Please might expect a max.15% figure reduction in finishes other than white