


luxo IP65

K50153.01.RF.BK-BK.38.ST.9.40.PC

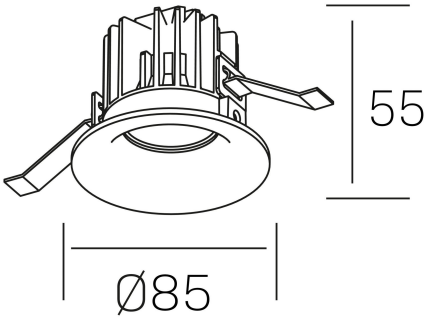

GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	Black-Black
LIGHT DIRECTION	Fixed
BEAM ANGLE	15º, 25º, 38º, 60º
INT/EXT IP DEGREE	IP 65
MATERIAL	Aluminum
IK DEGREE	IK05
UTILIZATION	Indoor
WARRANTY	5 years

ELECTRICAL DETAILS

LAMP	LED
POWER	12 W
COLOUR TEMPERATURE	4000K
LUMINOUS FLUX	1100 lm
EFFICACY DIMMING	88 Lm/W
DIMABLE	PHASE CUT
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI>90
VOLTAGE	220-240 V
CURRENT INTENSITY	300 mA
LIFE TIME	50.000 h

GENERAL DIMENSIONS

DIMENSIONS	Ø 85 mm
CUT OUT	Ø 76 mm
HEIGHT	h 55 mm
DIMENSIONES DE EMBALAJE	100 × 100 × 100 mm
PESO NETO	0.34

*Please might expect a max.15% figure reduction in finishes other than white

Partida Madrigueres Sud 63A, Naves1-4, 03700 Dénia · Alicante (Spain) | Tel. 0034 96 575 3083 · info@kohl-lighting.com · www. kohl-lighting.com