




**luxo tilt**  
K50151.01.RF.BK-BK.25.ST.9.40.PC

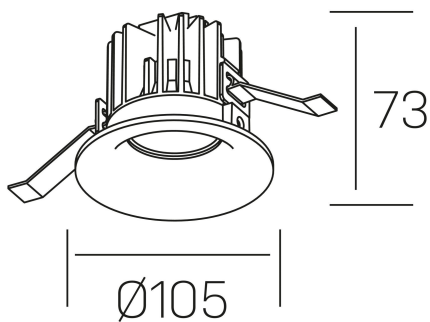

#### GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	Black-Black
LIGHT DIRECTION	Orientable
TILTING DEGREES	20°
BEAM ANGLE	25°
INT/EXT IP DEGREE	IP 32
MATERIAL	Aluminum
IK DEGREE	IK05
UTILIZATION	Indoor
WARRANTY	3 years

#### ELECTRICAL DETAILS

LAMP	LED
POWER	12 W
COLOUR TEMPERATURE	4000K
LUMINOUS FLUX	880 Lm
EFFICACY DIMMING	68 Lm/W
DIMABLE	PHASE CUT
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI>90
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	300 mA
LIFE TIME	50.000 h

#### GENERAL DIMENSIONS

DIMENSIONS	Ø 105 mm
CUT OUT	Ø 95 mm
HEIGHT	h 73 mm
DIMENSIONES DE EMBALAJE	100 × 100 × 100 mm
PESO NETO	0.28

\*Please might expect a max.15% figure reduction in finishes other than white