


mailbox
K60100.01.WR.GY-GY.ST.8.30

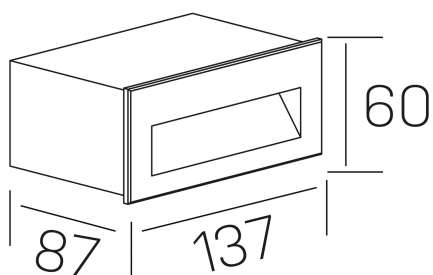

GENERAL DETAILS

INSTALLATION	Wall Recessed
FINISHES ALUMINIUM	Grey-Grey
LIGHT DIRECTION	Fixed
INT/EXT IP DEGREE	IP 65
MATERIAL	Aluminum
IK DEGREE	IK05
UTILIZATION	Outdoor
WARRANTY	5 years

ELECTRICAL DETAILS

LAMP	LED
POWER	4 W
COLOUR TEMPERATURE	3000K
LUMINOUS FLUX	106 Lm
EFFICACY DIMMING	31 Lm/W
DIMABLE	No Dim
DRIVER	Integrated
CLASS PROTECTION	I
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	110-240 V
CURRENT INTENSITY	700 mA
LIFE TIME	50.000 h

GENERAL DIMENSIONS

DIMENSIONS	137×87 mm
CUT OUT	132x82x55 mm
HEIGHT	h 60 mm
DIMENSIONES DE EMBALAJE	1.45 × 95 × 70 mm
PESO NETO	0.62

*Please might expect a max.15% figure reduction in finishes other than white