


**mailboxBKP**  
K60100.01.WR.BK-BK.ST.8.30

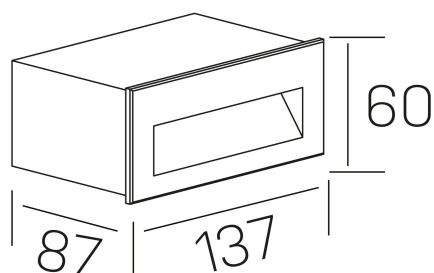

## GENERAL DETAILS

|                    |               |
|--------------------|---------------|
| INSTALLATION       | Wall Recessed |
| FINISHES ALUMINIUM | Black-Black   |
| LIGHT DIRECTION    | Fixed         |
| INT/EXT IP DEGREE  | IP 65         |
| MATERIAL           | Aluminum      |
| IK DEGREE          | IK05          |
| UTILIZATION        | Outdoor       |
| WARRANTY           | 5 years       |

## ELECTRICAL DETAILS

|                        |            |
|------------------------|------------|
| LAMP                   | LED        |
| POWER                  | 4 W        |
| COLOUR TEMPERATURE     | 3000K      |
| LUMINOUS FLUX          | 106 Lm     |
| EFFICACY DIMMING       | 31 Lm/W    |
| DIMABLE                | No Dim     |
| DRIVER                 | Integrated |
| CLASS PROTECTION       | I          |
| COLOUR RENDERING INDEX | CRI >80    |
| VOLTAGE                | 110-240 V  |
| CURRENT INTENSITY      | 700 mA     |
| LIFE TIME              | 50.000 h   |

## GENERAL DIMENSIONS

|                         |                   |
|-------------------------|-------------------|
| DIMENSIONS              | 137x87 mm         |
| CUT OUT                 | 132x82x55 mm      |
| HEIGHT                  | h 60 mm           |
| DIMENSIONES DE EMBALAJE | 1.45 x 95 x 70 mm |
| PESO NETO               | 0.62              |

\*Please might expect a max.15% figure reduction in finishes other than white