




myni
K50704.01.WS.WH-WH.ST.8.30

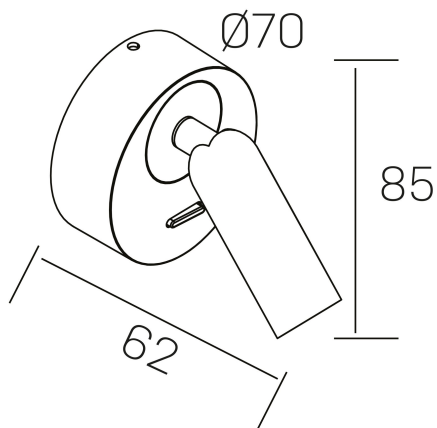

GENERAL DETAILS

INSTALLATION	Wall Surface
FINISHES ALUMINIUM	White-White
LIGHT DIRECTION	Orientable
TILTING DEGREES	90°
ROTATION DEGREES	360°
INT/EXT IP DEGREE	IP20
MATERIAL	Aluminum
IK DEGREE	IK010
UTILIZATION	Indoor
WARRANTY	3 years

ELECTRICAL DETAILS

LAMP	LED
POWER	3 W
COLOUR TEMPERATURE	3000K
LUMINOUS FLUX	165 Lm
EFFICACY DIMMING	49 Lm/W
DIMABLE	No Dim
DRIVER	Integrated
CLASS PROTECTION	I
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	650 mA
LIFE TIME	50.000 h

GENERAL DIMENSIONS

DIMENSIONS	Ø 70x62 mm
HEIGHT	h 85 mm
DIMENSIONES DE EMBALAJE	80 × 80 × 85 mm
PESO NETO	0.2

*Please might expect a max.15% figure reduction in finishes other than white