


noon sq asymetric

K50806.01.RF.BK-BK.38.ST.8.30.PC

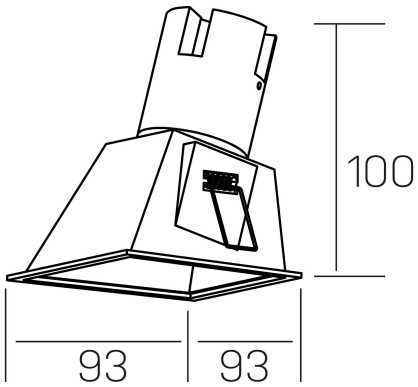

GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	Black-Black
LIGHT DIRECTION	Fixed
BEAM ANGLE	38º
INT/EXT IP DEGREE	IP 23
MATERIAL	Aluminio/Policarbonato
IK DEGREE	IK03
UTILIZATION	Indoor
WARRANTY	5 years

ELECTRICAL DETAILS

LAMP	LED
POWER	5 W
COLOUR TEMPERATURE	3000K
LUMINOUS FLUX	480 Lm
EFFICACY DIMMING	80 Lm/W
DIMABLE	PHASE CUT
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
CURRENT INTENSITY	135 mA
LIFE TIME	50.000 h

GENERAL DIMENSIONS

DIMENSIONS	93×93 mm
CUT OUT	85x85 mm
HEIGHT	h 100 mm
DIMENSIONES DE EMBALAJE	105 × 105 × 120 mm
PESO NETO	0.15

*Please might expect a max.15% figure reduction in finishes other than white

Partida Madrigueres Sud 63A, Naves1-4, 03700 Dénia · Alicante (Spain) | Tel. 0034 96 575 3083 · info@kohl-lighting.com · www. kohl-lighting.com