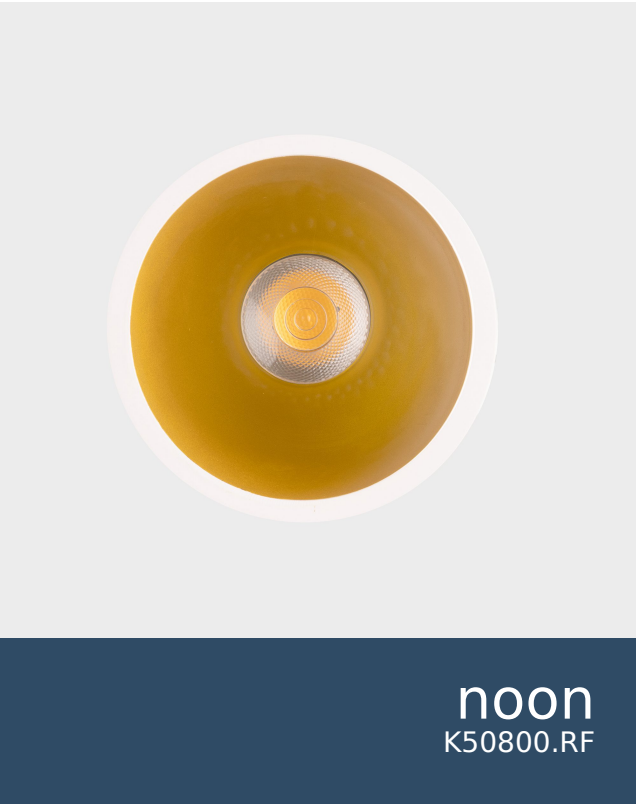


noon
K50800.RF

GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	Black-Black, White-Gold, White-White
LIGHT DIRECTION	Fixed
BEAM ANGLE	38º
INT/EXT IP DEGREE	IP 23
MATERIAL	Aluminio/Policarbonato
IK DEGREE	IK03
UTILIZATION	Indoor
WARRANTY	5 years

ELECTRICAL DETAILS

LAMP	LED
POWER	5 W, 7 W, 10W
COLOUR TEMPERATURE	2700K, 3000K, 4000K
LUMINOUS FLUX	470 Lm, 480 Lm, 490 Lm, 575 Lm, 585 Lm, 595 lm, 890 Lm, 900 lm, 910 Lm
EFFICACY DIMMING	77 Lm/W, 78 Lm/W, 79 Lm/W, 80 Lm/W, 82 Lm/W, 85 Lm/W, 86 Lm/W, 87 Lm/W
DIMABLE	1.10v, DALI, No Dim, PHASE CUT, Push
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI >80, CRI>90
VOLTAGE	220-240 V
CURRENT INTENSITY	135 mA, 160 mA, 250 mA
LIFE TIME	50.000 h

GENERAL DIMENSIONS

DIMENSIONS	Ø 83 mm, Ø 93 mm, Ø 70 mm
CUT OUT	Ø 75 mm, Ø 85 mm, Ø 62 mm
HEIGHT	h 80 mm, h 83.5 mm, h 100 mm
DIMENSIONES DE EMBALAJE	N/A

*Please might expect a max.15% figure reduction in finishes other than white