




**noon**  
K50800.02.RF.WH-WH.38.ST.8.30.D1

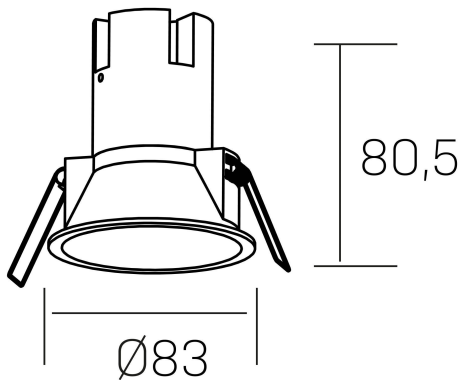

#### GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	White-White
LIGHT DIRECTION	Fixed
BEAM ANGLE	38°
INT/EXT IP DEGREE	IP 23
MATERIAL	Aluminio/Polycarbonato
IK DEGREE	IK03
UTILIZATION	Indoor
WARRANTY	3 years

#### ELECTRICAL DETAILS

LAMP	LED
POWER	7 W
COLOUR TEMPERATURE	3000K
LUMINOUS FLUX	585 Lm
EFFICACY DIMMING	78 Lm/W
DIMABLE	1.10v
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	160 mA
LIFE TIME	35.000 h

#### GENERAL DIMENSIONS

DIMENSIONS	$\varnothing 83$ mm
CUT OUT	$\varnothing 75$ mm
HEIGHT	h-835-mm
DIMENSIONES DE EMBALAJE	95 × 95 × 110 mm
PESO NETO	0.15

\*Please might expect a max.15% figure reduction in finishes other than white