




**nses**

K51300.02.RF.WH-BK.30.ST.9.30.D1

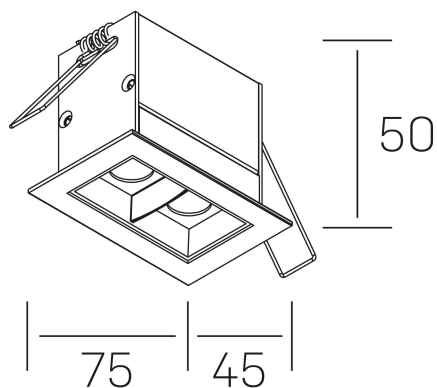

#### GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	Black-White
LIGHT DIRECTION	Fixed
BEAM ANGLE	30°
INT/EXT IP DEGREE	IP20/23
MATERIAL	Aluminum
IK DEGREE	IK 6
UTILIZATION	Indoor
WARRANTY	3 years

#### ELECTRICAL DETAILS

LAMP	LED
POWER	4 W
COLOUR TEMPERATURE	3000K
LUMINOUS FLUX	345 Lm
EFFICACY DIMMING	69 Lm/W
DIMABLE	1.10v
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI>90
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	700 mA
LIFE TIME	50.000 h

#### GENERAL DIMENSIONS

DIMENSIONS	75x45 mm
CUT OUT	68x37 mm
DIMENSIONES DE EMBALAJE	115 x 85 x 80 mm
PESO NETO	18

\*Please might expect a max.15% figure reduction in finishes other than white