




**nses**  
K51300.03.RF.BK-BK.15.ST.9.27

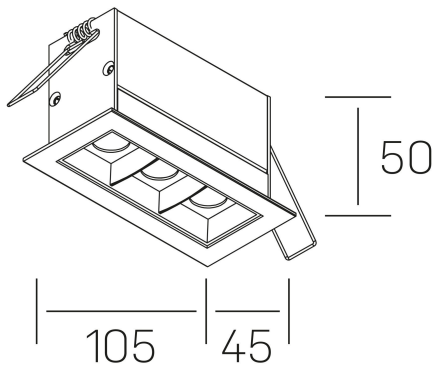

#### GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	Black-Black
LIGHT DIRECTION	Fixed
BEAM ANGLE	15°
INT/EXT IP DEGREE	IP20/23
MATERIAL	Aluminum
IK DEGREE	IK 6
UTILIZATION	Indoor
WARRANTY	3 years

#### ELECTRICAL DETAILS

LAMP	LED
POWER	6 W
COLOUR TEMPERATURE	2700K
LUMINOUS FLUX	175 Lm, 185 Lm, 195 Lm, 335 Lm, 345 Lm, 355 Lm, 480 Lm, 520 Lm, 560 Lm, 835 Lm, 875 Lm, 915 Lm, 1430 Lm, 1530 Lm, 1630 Lm
EFFICACY DIMMING	58 Lm/W, 62 Lm/W, 65 Lm/W, 67 Lm/W, 68 Lm/W, 69 Lm/W, 70 Lm/W, 71 Lm/W, 73 Lm/W, 74 Lm/W, 76 Lm/W, 78 Lm/W, 80 Lm/W
DIMABLE	No Dim
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI>90
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	700 mA
LIFE TIME	35.000 h

#### GENERAL DIMENSIONS

DIMENSIONS	105×45 mm
CUT OUT	96×37 mm
DIMENSIONES DE EMBALAJE	190 × 80 × 85 mm
PESO NETO	26

\*Please might expect a max.15% figure reduction in finishes other than white