




sign
K50702.01.WR.BK-BK.ST.8.30

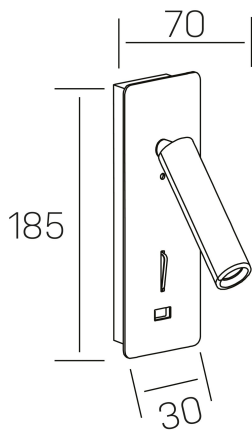

GENERAL DETAILS

INSTALLATION	Wall Recessed
FINISHES ALUMINIUM	Black-Black
LIGHT DIRECTION	Orientable
TILTING DEGREES	90°
ROTATION DEGREES	360°
INT/EXT IP DEGREE	IP20
MATERIAL	Aluminum
IK DEGREE	IK010
UTILIZATION	Indoor
WARRANTY	3 years

ELECTRICAL DETAILS

LAMP	LED
POWER	3 W
COLOUR TEMPERATURE	3000K
LUMINOUS FLUX	160 Lm
EFFICACY DIMMING	49 Lm/W
DIMABLE	No Dim
DRIVER	Integrated
CLASS PROTECTION	I
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	650 mA
LIFE TIME	50.000 h

GENERAL DIMENSIONS

DIMENSIONS	70 X 30 mm
CUT OUT	56X175 mm
HEIGHT	h 185 mm
DIMENSIONES DE EMBALAJE	80 x 80 x 200 mm
PESO NETO	0.56

*Please might expect a max.15% figure reduction in finishes other than white