


versus litl

K51103.01.RF.GC-BK.30.ST.8.40.PC

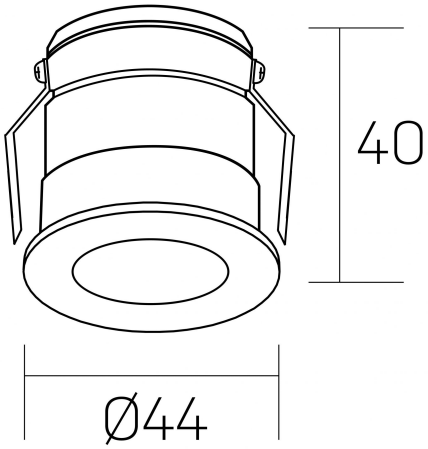

GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	Gold Cava-Negro
LIGHT DIRECTION	Fixed
BEAM ANGLE	30º
INT/EXT IP DEGREE	IP 32
MATERIAL	Aluminum
IK DEGREE	IK05
UTILIZATION	Indoor
WARRANTY	5 years

ELECTRICAL DETAILS

LAMP	LED
POWER	3 W
COLOUR TEMPERATURE	4000K
LUMINOUS FLUX	130 Lm
EFFICACY DIMMING	44 Lm/W
DIMABLE	PHASE CUT
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
CURRENT INTENSITY	600 mA
LIFE TIME	50.000 h

GENERAL DIMENSIONS

DIMENSIONS	Ø 44 mm
CUT OUT	Ø 40 mm
HEIGHT	h 40 mm
DIMENSIONES DE EMBALAJE	82 × 52 × 78 mm
PESO NETO	0.086

*Please might expect a max.15% figure reduction in finishes other than white

Partida Madrigueres Sud 63A, Naves1-4, 03700 Dénia · Alicante (Spain) | Tel. 0034 96 575 3083 · info@kohl-lighting.com · www. kohl-lighting.com