


**versus litl**  
K51103.01.RF.GC-BK.30.ST.8.27.PC

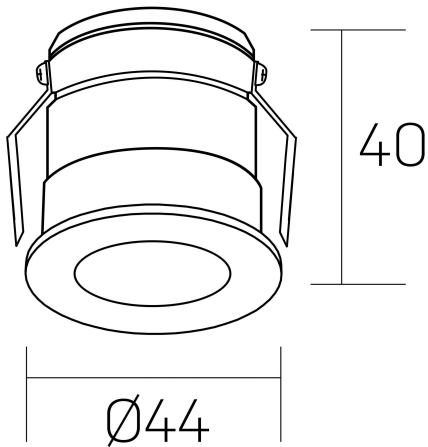

#### GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	Gold Cava-Negro
LIGHT DIRECTION	Fixed
BEAM ANGLE	30°
INT/EXT IP DEGREE	IP 32
MATERIAL	Aluminum
IK DEGREE	IK05
UTILIZATION	Indoor
WARRANTY	3 years

#### ELECTRICAL DETAILS

LAMP	LED
POWER	3 W
COLOUR TEMPERATURE	2700K
LUMINOUS FLUX	90 Lm
EFFICACY DIMMING	36 Lm/W
DIMABLE	PHASE CUT
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	600 mA
LIFE TIME	50.000 h

#### GENERAL DIMENSIONS

DIMENSIONS	Ø 44 mm
CUT OUT	Ø 40 mm
HEIGHT	h 40 mm
DIMENSIONES DE EMBALAJE	82 × 52 × 78 mm
PESO NETO	0.086

\*Please might expect a max.15% figure reduction in finishes other than white