


versus litl
K51103.01.RF.GC-BK.30.ST.8.30.PC

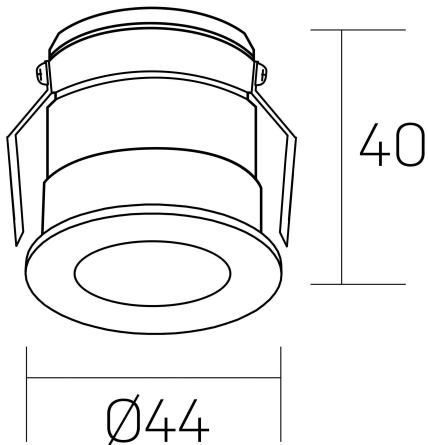

GENERAL DETAILS

| | |
|--------------------|---------------------|
| INSTALLATION | recessed with frame |
| FINISHES ALUMINIUM | Gold Cava-Negro |
| LIGHT DIRECTION | Fixed |
| BEAM ANGLE | 30° |
| INT/EXT IP DEGREE | IP 32 |
| MATERIAL | Aluminum |
| IK DEGREE | IK05 |
| UTILIZATION | Indoor |
| WARRANTY | 3 years |

ELECTRICAL DETAILS

| | |
|------------------------|-----------|
| LAMP | LED |
| POWER | 3 W |
| COLOUR TEMPERATURE | 3000K |
| LUMINOUS FLUX | 133 Lm |
| EFFICACY DIMMING | 38 Lm/W |
| DIMABLE | PHASE CUT |
| DRIVER | Remote |
| CLASS PROTECTION | II |
| COLOUR RENDERING INDEX | CRI >80 |
| VOLTAGE | 220-240 V |
| FRECUENCIA | 50-60 Hz |
| CURRENT INTENSITY | 600 mA |
| LIFE TIME | 35.000 h |

GENERAL DIMENSIONS

| | |
|-------------------------|-----------------|
| DIMENSIONS | Ø 44 mm |
| CUT OUT | Ø 40 mm |
| HEIGHT | h 40 mm |
| DIMENSIONES DE EMBALAJE | 82 × 52 × 78 mm |
| PESO NETO | 0.086 |

*Please might expect a max.15% figure reduction in finishes other than white