




versus
K51100.01.RF.BK-BK.38.ST.8.40.D1

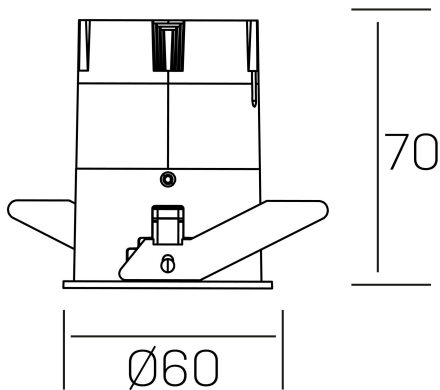

GENERAL DETAILS

| | |
|--------------------|---------------------|
| INSTALLATION | recessed with frame |
| FINISHES ALUMINIUM | Black-Black |
| LIGHT DIRECTION | Fixed |
| BEAM ANGLE | 38° |
| INT/EXT IP DEGREE | IP 23 |
| MATERIAL | Aluminum |
| IK DEGREE | IK03 |
| UTILIZATION | Indoor |
| WARRANTY | 3 years |

ELECTRICAL DETAILS

| | |
|------------------------|-----------|
| LAMP | LED |
| POWER | 5 W |
| COLOUR TEMPERATURE | 4000K |
| LUMINOUS FLUX | 420 lm |
| EFFICACY DIMMING | 77 Lm/W |
| DIMABLE | 1.10v |
| DRIVER | Remote |
| CLASS PROTECTION | II |
| COLOUR RENDERING INDEX | CRI >80 |
| VOLTAGE | 220-240 V |
| FRECUENCIA | 50-60 Hz |
| CURRENT INTENSITY | 120 mA |
| LIFE TIME | 50.000 h |

GENERAL DIMENSIONS

| | |
|-------------------------|------------------|
| DIMENSIONS | Ø 60 mm |
| CUT OUT | Ø 55 mm |
| HEIGHT | h 70 mm |
| DIMENSIONES DE EMBALAJE | 95 × 135 × 85 mm |
| PESO NETO | 0.17 |

*Please might expect a max.15% figure reduction in finishes other than white