




**versus**  
K51100.01.RF.BK-BK.38.ST.8.40.PC

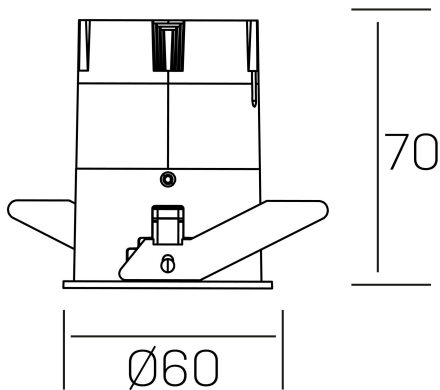

## GENERAL DETAILS

|                    |                     |
|--------------------|---------------------|
| INSTALLATION       | recessed with frame |
| FINISHES ALUMINIUM | Black-Black         |
| LIGHT DIRECTION    | Fixed               |
| BEAM ANGLE         | 38°                 |
| INT/EXT IP DEGREE  | IP 23               |
| MATERIAL           | Aluminum            |
| IK DEGREE          | IK03                |
| UTILIZATION        | Indoor              |
| WARRANTY           | 3 years             |

## ELECTRICAL DETAILS

|                        |           |
|------------------------|-----------|
| LAMP                   | LED       |
| POWER                  | 5 W       |
| COLOUR TEMPERATURE     | 4000K     |
| LUMINOUS FLUX          | 420 lm    |
| EFFICACY DIMMING       | 77 Lm/W   |
| DIMABLE                | PHASE CUT |
| DRIVER                 | Remote    |
| CLASS PROTECTION       | II        |
| COLOUR RENDERING INDEX | CRI >80   |
| VOLTAGE                | 220-240 V |
| FRECUENCIA             | 50-60 Hz  |
| CURRENT INTENSITY      | 120 mA    |
| LIFE TIME              | 50.000 h  |

## GENERAL DIMENSIONS

|                         |                  |
|-------------------------|------------------|
| DIMENSIONS              | Ø 60 mm          |
| CUT OUT                 | Ø 55 mm          |
| HEIGHT                  | h 70 mm          |
| DIMENSIONES DE EMBALAJE | 95 × 135 × 85 mm |
| PESO NETO               | 0.17             |

\*Please might expect a max.15% figure reduction in finishes other than white