




**versus**  
K51100.02.RF.BK-BK.38.ST.8.40.PC

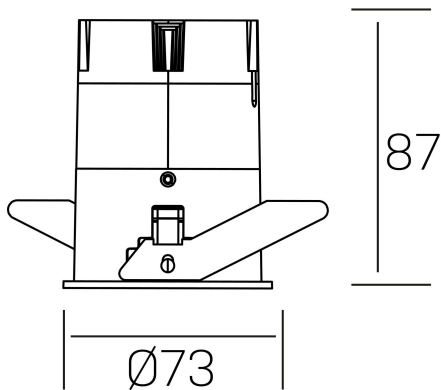

#### GENERAL DETAILS

INSTALLATION	recessed with frame
FINISHES ALUMINIUM	Black-Black
LIGHT DIRECTION	Fixed
BEAM ANGLE	38°
INT/EXT IP DEGREE	IP 23
MATERIAL	Aluminum
IK DEGREE	IK03
UTILIZATION	Indoor
WARRANTY	3 years

#### ELECTRICAL DETAILS

LAMP	LED
POWER	10W
COLOUR TEMPERATURE	4000K
LUMINOUS FLUX	965 Lm
EFFICACY DIMMING	82 Lm/W
DIMABLE	PHASE CUT
DRIVER	Remote
CLASS PROTECTION	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	250 mA
LIFE TIME	50.000 h

#### GENERAL DIMENSIONS

DIMENSIONS	Ø 73 mm
CUT OUT	Ø 66 mm
HEIGHT	h 87 mm
DIMENSIONES DE EMBALAJE	110 × 145 × 100 mm
PESO NETO	0.22

\*Please might expect a max.15% figure reduction in finishes other than white