



CHESS K-SELECT


REF: K50510.RF



INSTALLATION INSTRUCTIONS

ALUMINIUM	IP20 IP23	IK03	LIGHT DIRECTION FIXED	DIM OPTIONAL	UGR ≤ 19
REMOTE	0°	0°	INDOOR	220-240 V 50-60 Hz	
		LIFE 35.000h	WARRANTY 3 Years	CE	

V.01

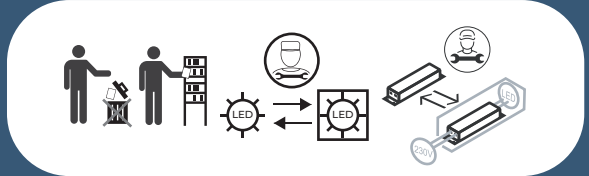

<p>*K50510.01 *K50510.02 *K50510.03</p> <p>595x595mm 40W h 8mm 1195x295mm 36W h 8mm 1195x595mm 60W h 8mm</p>			<p>1</p>		<p>2</p>												
<p>3</p> <p>Choose Color Temperature moving the selector</p>		<p>4</p>		<p>5</p> <p>Security h+20mm</p>													
<p>6</p>		<p>7</p>		<p>8</p>													
<p>9</p>		<p>10</p> <p>CONNECTION</p> <p>AC 220-240V</p> <table border="1"> <tr> <td>ON-OFF</td> <td>PUSH 1</td> <td>DAI1</td> </tr> <tr> <td>L N SEC</td> <td>L N PUSH SEC</td> <td>L N DA1 DA2 SEC</td> </tr> <tr> <td>1-10 V</td> <td>PUSH 2</td> <td>PHASE CUT</td> </tr> <tr> <td>L N 1:10V SEC</td> <td>L N PUSH DAI/N DA/L SEC</td> <td>OPPOSED L N SEC</td> </tr> </table> <p>*Models 01, 02 and 03 don't work with PHASE CUT</p>		ON-OFF	PUSH 1	DAI1	L N SEC	L N PUSH SEC	L N DA1 DA2 SEC	1-10 V	PUSH 2	PHASE CUT	L N 1:10V SEC	L N PUSH DAI/N DA/L SEC	OPPOSED L N SEC	<p>11</p>	
ON-OFF	PUSH 1	DAI1															
L N SEC	L N PUSH SEC	L N DA1 DA2 SEC															
1-10 V	PUSH 2	PHASE CUT															
L N 1:10V SEC	L N PUSH DAI/N DA/L SEC	OPPOSED L N SEC															
<p>12</p>		<p>13</p>		<p>3 TYPES OF DIFFUSER</p> <table border="1"> <tr> <td>OPAL</td> <td>MICROPRISMATIC</td> <td>SKY</td> </tr> </table>		OPAL	MICROPRISMATIC	SKY									
OPAL	MICROPRISMATIC	SKY															

