




**lim**  
K50320.02.RF.BK-BK.MP.ST.8.30.DA

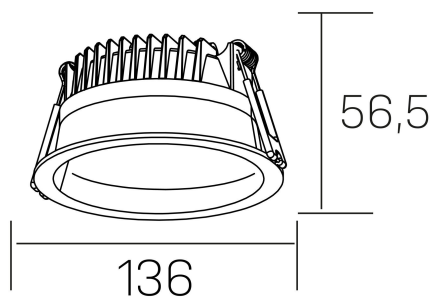

## GENERAL DETAILS

|                    |                     |
|--------------------|---------------------|
| INSTALLATION       | recessed with frame |
| FINISHES ALUMINIUM | Black-Black         |
| OPTIC COVER        | Microprismatico     |
| LIGHT DIRECTION    | Fixed               |
| INT/EXT IP DEGREE  | IP 44               |
| MATERIAL           | Aluminum            |
| IK DEGREE          | IK 6                |
| UTILIZATION        | Indoor              |
| WARRANTY           | 3 years             |

## ELECTRICAL DETAILS

|                        |           |
|------------------------|-----------|
| LAMP                   | LED       |
| POWER                  | 12 W      |
| COLOUR TEMPERATURE     | 3000K     |
| LUMINOUS FLUX          | 1030 Lm   |
| EFFICACY DIMMING       | 85 Lm/W   |
| DIMABLE                | DALI      |
| DRIVER                 | Remote    |
| CLASS PROTECTION       | II        |
| COLOUR RENDERING INDEX | CRI >80   |
| VOLTAGE                | 220-240 V |
| FRECUENCIA             | 50-60 Hz  |
| CURRENT INTENSITY      | 300 mA    |
| LIFE TIME              | 35.000 h  |

## GENERAL DIMENSIONS

|                         |                   |
|-------------------------|-------------------|
| DIMENSIONS              | Ø 136 mm          |
| CUT OUT                 | Ø 120 mm          |
| HEIGHT                  | h 56,5 mm         |
| DIMENSIONES DE EMBALAJE | 145 × 145 × 70 mm |
| PESO NETO               | 0.36              |

\*Please might expect a max.15% figure reduction in finishes other than white